AOD 064 OPEN FRAME

USER'S MANUAL

ALLINONE DISPLAY INC.
www.aodlcd.com

Web site : www.aodlcd.com
Tel :02-3283-7495 / Fax : 02-3283-7498
3F, B-Dong, Micro office B.D 554-2 GaSan-Dong, GumChun-Ku, Seoul , Korea

Specifications

Model		6.4 inch XGA TFTLCD Monitor
Display		
Type		6.4"Color Active Matrix TFT LCD
Color		262,144 Color
Pixel		0.204 x 0.204 mm
Screen Size		246 (H) x 184.5 (V) mm
Resolution (Max)		640 x 480 at 60 to 75Hz
Contrast Ratio	300:1	
Brightness		250 cd/m^2
Video		
Frequency		Horizontal: 56 ~ 75KHz Vertical: 31.5 ~ 80Hz
Compatibility		
Plug and Play		VESA DDC 1/2B
Compatibility		VESA / IBM / MAC
Power		VESA Standard, DPMS
Operation Environment		
Power Consumption		Operation Mode: 35 watt max. Stand-by: 4 watt max.
Temperature		Operation Mode : 0 ºC ~ 40 ºC Stand-by: -20 ºC ~ 60 ºC
Humidity		Operation Mode: 10% ~ 85% R.H. Stand-by: 90% R.H. Max.
User's Mode		
OSD Key		Auto / Menu / Down / Up / Enter / Power

All In One

OSD (On-Screen-Menu)

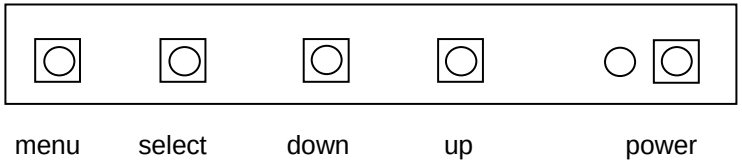

Button	Function	Status
POWER	Power ON or OFF	ON/OFF
LED	Indicate working status	Green : On Red : Stand-by Orange : No signal
UP	Launch OSD Menu or Add Value	Move to OSD Menu
DOWN	Launch OSD Menu or Down value	Move to OSD Menu
SELECT	Select OSD Menu	
MENU	On / Off OSD Menu	

OSD Controls

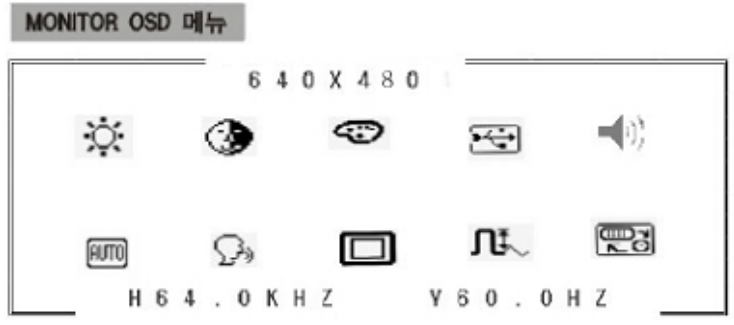

BRIGHTNESS : Adjust brightness
CONTRAST : Adjust contrast
COLOR CONTROL : Adjust color to user,9300K,6500K
Adjust RED,GREEN,BLUE when selecting User
MISCELLANEOUS - Initialize : Make all setting value as initialization.
- OSD Timer : Adjust the time displayed on the menu box from 5sec to 100sec optionally.
- OSD Position : Adjust the position of the menu box optionally.
SOUND : -Volume : Adjust AMP volume
- Mute : Speaker on/off
- Treble : Adjust optionally
- Base : Adjust optionally

AUTO(AUTO ADJUST) : Adjust the status of monitor automatically to high quality
Language : Available for 10 foreign language(English, France, Dutch, Italiano, Espano, Deutch, Svenska,Suomi, Dansk, Portuglues)
H-B PPOSITION -H. Position : Adjust horizontality
- V. Position : Adjust verticality
Frequency/Clock: - Phase : Adjust noise, overlapping display
- Clock : Adjust a number of pixel of horizontal plane
Input : RGB - Select VGA signal of computer
SVHS – Select super video signal
Composite Video – Select video signal
TV- Select TV signal when choosing TV option

Contents Of the Retail Package



Monitor

User's Manual



AC/DC Adaptor

Power Cord

VGA Cable

Audio Cable

Touch Driver (Option)

Composite Cable (Option)

S-video Cable (Option)

Troubleshooting

TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER.
NO USER-SERVICEABLE PARTS INSIDE.
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

The monitor does not respond after you turn on the system.
Make sure that the monitor is turned on.
Turn off the power and check the monitor's power cord, AC adapter, and signal cable for proper connection.
Appear the " No Input the Signal"
Check the connecting of the audio cable between the monitor and the computer.
Appear the " Input Not the Supported"
Input signal are insuperable, reset the video mode.
The appearance is not at the screen center.
Use "AUTO ADJUST", refer to the Controls section.
The characters on the screen are too dim or too bright
Choose fit color temperature, use "AUTO COLOUR ADJUST or manually adjust "RGB ADJUSTMENT, refer to the Control section.

Drawing

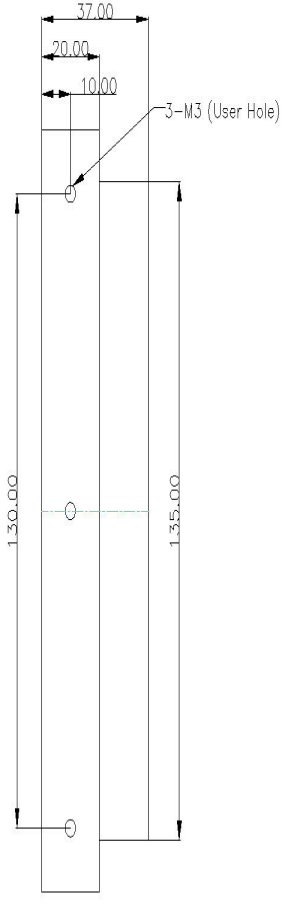

Side view

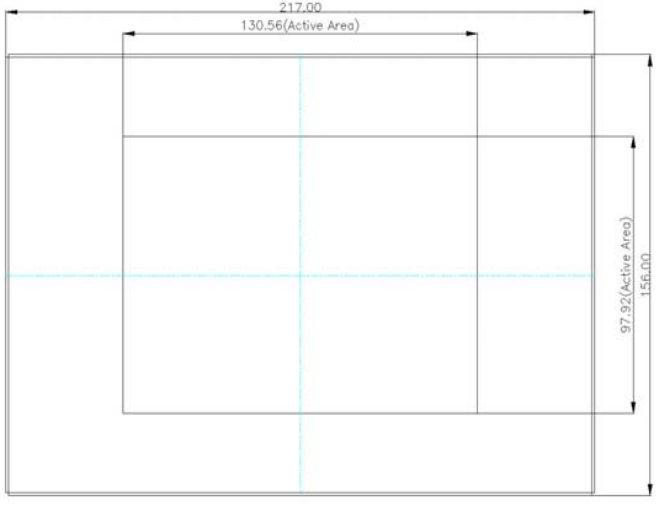

Front view

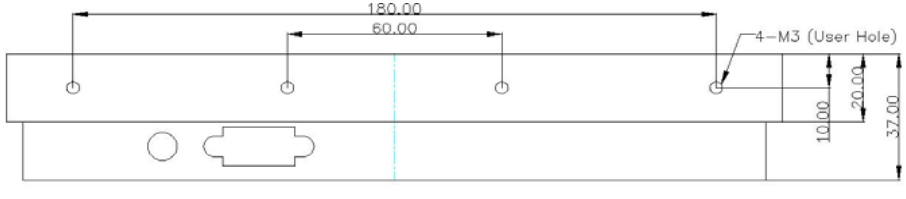

Bottom view

Specification of **(OPTION)**
5 Wire Analog Resistive Touch Panel

A. Application

This specification applies to the **5 Wire Analog Resistive Touch Panel**.

B. Environmental Conditions

1. **Operating Temperature Range**
   -20°C ~ 70°C
2. **Operating Humidity Range**
   5% ~ 96% RH (no dew falls)
3. **Storage Temperature Range**
   -25°C ~ 80°C
4. **Storage Humidity Range**
   5% ~ 96% RH (no dew falls)
5. **Water Spray**
   Not damaged by running water applied to the active area.
6. **Vibration**
   Withstand 0.01 inches peak to peak excursion, at a frequency of 5 to 455 Hz, for a period of 15 minutes in each of three axes.
7. **Chemical Resistance**
   The touch panel active area of the touchscreen is resistant to the following chemicals when exposed for a period of one hour at a temperature of 21°C:
   - Acetone
   - Ammonia-based glass cleaners
   - Common foods and beverages
   - Hexane
   - Isopropyl alcohol
   - Methylene chloride
   - Methyl ethyl ketone
   - Mineral spirits
   - Turpentine

AOD
All In One

C. Electrical Characteristics

1. **Supply Voltage**
   +5VDC, nominal.
2. **Lead to Lead Resistance**
   40Ω ~ 100Ω (between X – Y)
   50Ω ~ 110Ω (between X – LX)
   50Ω ~ 110Ω (between Y – LY)
   40Ω ~ 100Ω (between LX – LY)
3. **Contact Bounce**
   Less than 10 ms (input by finger).
4. **Electrostatic Discharge Protection**
   Withstands 20 discharges of 15kV, distributed randomly across the active area with proper transient protection.
   (per EN 61000-4-2, 1995)

D. Mechanical Characteristics

1. **Activation force**
   Less than 40gr.
   Using by the silicone finger, hardness = 60°of diameter 16mm.
2. **Input Methods**
   Finger, glove hand, pen or stylus.
3. **Surface Hardness**
   Meets pencil hardness 3H (per ASTM D3363).
4. **Position Accuracy (Linearity)**
   Less than 1%.
5. **Resolution**
   Based on controller resolution of 4096 x 4096.
6. **Cable**
   • Type: F.C.C. (flat conductor cable)
   • Standard length: 300mm
   • Connecting area with touch panel
   The tensile force: vertical to touch panel — 2.0 kg
   straight to touch panel —1.0 kg
   Connecting type: 5 points soldering adding UV glue
   Cable fold : 10 times in 1R, 180 degrees
   Detail specification: ETC test, No.: ET-88T-12-102-C00
7. **Connector**
   Five-position, 0.025 inch (0.635mm) square post receptacle with 2.54mm centers.
   The times of insertions and withdrawals : at least 100 times.

E. Reliability

The following characteristics are generated by evaluating test samples after 2 hours leaving in the room condition when each of the reliability tests finishes.

Test Item	Result	Remark
Storage Temperature-high	80°C for 240hours	At ambient humidity
Storage Temperature-low	-25°C for 240hours	
Thermal Shock	-20°C (1hr.) ~ 70°C (1hr.) 10cycles	
High Temp./Humidity Test	60°C/90%RH : 240hours	
Operating Life 1 : Hitting Key Test (*1)	250g , 2 activations / sec. More than 35,000,000 times	By using Silicone finger (*2)
Operating Life 2 : Writing Test (*1)	250g , 4.5mm / sec. More than 1,000,000 times	By using polyester finger (*3)

*1 Without supplying Volts.
*2 Positions of hitting key are between the dots by Silicon finger (hardness 60° silicon rubber) of diameter 16mm.
*3 Writing test is made by polyester stylus pen with tip radius.

F. Optical Performance

Light Transmission 75~ 85% (typical value) (per ASTM D1003)

AOD All In One

Specification of
4 Wire Analog Resistive Touch Panel **(OPTION)**

A. Application

This specification applies to the **4 Wire Analog Resistive Touch Panel**.

B. Environmental Conditions

1. **Operating Temperature Range**
   -20°C ~ 70°C
2. **Operating Humidity Range**
   5% ~ 96% RH (no dew falls)
3. **Storage Temperature Range**
   -25°C ~ 80°C
4. **Storage Humidity Range**
   5% ~ 96% RH (no dew falls)
5. **Water Spray**
   Not damaged by running water applied to the active area.
6. **Chemical Resistance**
   The touch panel active area of the touchscreen is resistant to the following chemicals when exposed for a period of one hour at a temperature of 21°C:
   - Acetone
   - Ammonia-based glass cleaners
   - Common foods and beverages
   - Hexane
   - Isopropyl alcohol
   - Methylene chloride
   - Methyl ethyl ketone
   - Mineral spirits
   - Turpentine

C. Electrical Characteristics

1. **Supply Voltage**
   +5VDC, nominal
2. **Lead to Lead Resistance**
   200Ω ~ 500Ω (between X1 – X2)
   200Ω ~ 500Ω (between Y1 – Y2)
3. **Contact Bounce**
   Less than 10 ms (input by finger).
4. **Insulation Resistance**
   More than 20M ohms at DC 25V.

D. Mechanical Characteristics

1. **Activation force**
   Less than 40gr.
   Using by the silicone finger, hardness = 60°of diameter 16mm.
2. **Input Methods**
   Finger, glove hand, pen or stylus.
3. **Surface Hardness**
   Meets pencil hardness 3H (per ASTM D3363).
4. **Position Accuracy (Linearity)**
   Less than 1.5%.
5. **Resolution**
   Based on controller resolution of 4096 x 4096.

E. Reliability

The following characteristics are generated by evaluating test samples after 2 hours leaving in the room condition when each of the reliability tests finishes.

Test Item	Result	Remark
Storage Temperature-high	80°C for 240hours	At ambient humidity
Storage Temperature-low	-25°C for 240hours	
Thermal Shock	-20°C (1hr.)~ 70°C (1hr.) 10cycles	
High Temp./Humidity Test	60°C/90%RH : 240hours	
Operating Life 1 : Hitting Key Test (*1)	250g , 2 activations / sec. More than 3,000,000 times	By using Silicone finger (*2)
Operating Life 2 : Writing Test (*1)	250g , 4.5mm / sec. More than 200,000 times	By using polyester finger (*3)

*1 Without supplying Volts.

*2 Positions of hitting key are between the dots by Silicon finger (hardness 60° silicon rubber) of diameter 16mm.

*3 Writing test is made by polyester stylus pen with tip radius.

F. Optical Performance

Light Transmission 75~ 85% (typical value) (per ASTM D1003)

AOD All In One